

CLOPAY COMMERCIAL – MODEL 3722

energy series with intellicore®



Model 3722, 22'2" x 14' Doors; Shown with 24" x 8" Lites

CONSTRUCTION	STEEL	EFFICIENCY	WARRANTY
2" THICKNESS	20 GAUGE	18.4 R-VALUE	10YR LIMITED CONSTRUCTION



POLYURETHANE INSULATED FLUSH STEEL DOORS

Clopay Model 3722 is for commercial and industrial facilities where demanding conditions require a rugged door that is also energy efficient.

- Intellicore® polyurethane insulation and thermal break for improved energy efficiency.
- Three-layer steel plus steel insulation enhances durability, strength and quiet operation.
- 3-stage paint process delivers a virtually maintenance-free finish.
- Injection-molded lite frames with integral weatherseal are durable and seal against the elements. Many glass options available for visibility, privacy or energy efficiency.



Panels are preprimed inside and out to inhibit rust. Hot-dipped, galvanized steel is painted with primer and given a tough oven-baked polyester top coat to provide the most rust-resistant steel door available. Ten-year warranty against rust-through.

clopaycommercial.com

PANEL DESIGN



Flush

COLOR OPTIONS



Standard White

Chocolate

Due to the printing process, colors may vary.

CUSTOM PAINT OPTION



Color Blast® offers more than 1,500 Sherwin-Williams® color options to complement your building design. This durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

Due to solar reflective formulation to meet greater than a 38 LRV, some colors may not be available.

FEATURES

STANDARD HARDWARE

- TPE astragal in aluminum retainer
- Commercial 10-ball steel rollers (nylon tires available)
- Steel step plate and lift handle
- Galvanized steel end stiles
- Inside slide lock for increased security
- 2" (50.8 mm) or 3" (76.2 mm) track
- 10,000 cycle springs
- Galvanized aircraft cable with minimum 7:1 safety factor
- Variety of track configurations to meet building specifications

MATERIALS AND CONSTRUCTION


Panel Thickness	2" (50.8 mm)
Insulation	CFC and HCFC-free Intellicore® polyurethane
R-value	18.4*
Thermal Break	Continuous foam
Exterior Steel	20 gauge (.034" min.) (.86 mm)
Interior Steel	28 gauge (.015" min.) (.38 mm)
Exterior Surface	Stucco embossed, flush
Max Width	36'2" (11 m)
Max Height	24' (7.3 m)
Exterior Colors	Standard White and Chocolate. Also available in Color Blast®.
Interior Color	Standard White
Limited Warranties	10-year delamination 10-year rust-through 1-year material and workmanship

*Calculated door section R-value is in accordance with DASMA TDS-163.

For special sizes, applications and options, consult Commercial Information Assistance (CIA) at 1-800-526-4301.

ADDITIONAL OPTIONS

WINDOW OPTIONS

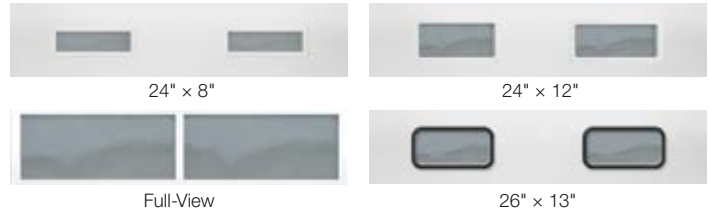

24" x 8"

24" x 12"

Full-View

26" x 13"

Available with nominal insulated, nominal insulated tempered or tempered glass. Full-view section, pre-painted Standard White or Chocolate; glazing options include DSB, tempered, plexiglass, insulated, insulated tempered and polycarbonate. 26" x 13" (66.04 cm x 33.02 cm) windows are available with Lexan® or plexiglass.

HEAVY-DUTY HARDWARE (where not standard)



Double-end hinge

3" Track

High performance hardware features 10 gauge end hinges, heavy-duty top bracket and 3" sealed roller with 5/8" stem.

MULLIONS



Carry-away, roll-away or swing-up mullions are available on select sizes.

BREAK-AWAY SECTION



Single section and double sections available on select sizes.

PASS DOOR



32" wide x 80" high (.81 m x 2.3 m), max 16'2" (4.9 m) wide section.

EXHAUST PORT



Can be cut into any type of sectional door. Available in select sizes.



WindCode® reinforcement available up to W1 design pressure (DP) 14 PSF, depending on size. Doors tested 50% greater than DP.



Upgrade your standard door with industrial-grade components.

HIGH CYCLE SPRINGS



25,000, 50,000 or 100,000 cycle springs available.

CODE COMPLIANT

This Clopay door complies with the 2015 IECC (International Energy Conservation Code) with an air infiltration rating of .40 cfm/ft² or less (IECC, Section 402.5.2), and also meets the U-factor requirement of .37 or less (IECC, Section C402.4, for Climate Zones 1 through 8).

JDT Garage Door Service

602-703-9582

info@jdtgaragedoor.com



For more information on these and other Clopay products, call 1-800-526-4301 or visit clopaycommercial.com



©2018 Clopay Building Products Company, Inc., a Griffon company.



CMDC-3722-07_REV1018